

ADB-CEC-DT6-UM

250W, UHF 2"/50.8mm Mask Filter
ATSC/DVB-T/ISDB-T



Product Description

The ADB-CEC-DT6-UM 2"/50.8mm Mask Filter is designed to provide superior mask filter performance at an affordable price. Cross coupling creates steep rejection skirts and the high-Q cavities provide low passband insertion loss in a compact design.

TYPICAL DVB-T SPECIFICATIONS


FREQUENCY	470-860 MHz
BANDWIDTH	$F_c \pm 3.80$ MHz
INSERTION LOSS	
F_c	0.70 dB
$F_c \pm 3.80$ MHz	1.75 dB
VSWR	1.12:1
REJECTION	
$F_c \pm 4.2$ MHz	3 dB
$F_c \pm 6.0$ MHz	16 dB
$F_c \pm 12$ MHz	36 dB
GROUP DELAY	175 ns
CONNECTORS	DIN 7-16 Female

TYPICAL ISDB-T SPECIFICATIONS

FREQUENCY	470-860 MHz
BANDWIDTH	$F_c \pm 2.79$ MHz
VSWR	1.12:1
CONNECTORS	DIN 7-16 Female

TYPICAL ATSC SPECIFICATIONS

FREQUENCY	470-860 MHz
BANDWIDTH	$F_c \pm 2.69$ MHz
INSERTION LOSS	
F_c	0.95 dB
$F_c \pm 2.69$ MHz	1.60 dB
VSWR	1.12:1
REJECTION	
$F_c \pm 3.5$ MHz	7 dB
$F_c \pm 4.0$ MHz	22 dB
$F_c \pm 9$ MHz	36 dB
GROUP DELAY	200 ns
CONNECTORS	DIN 7-16 Female

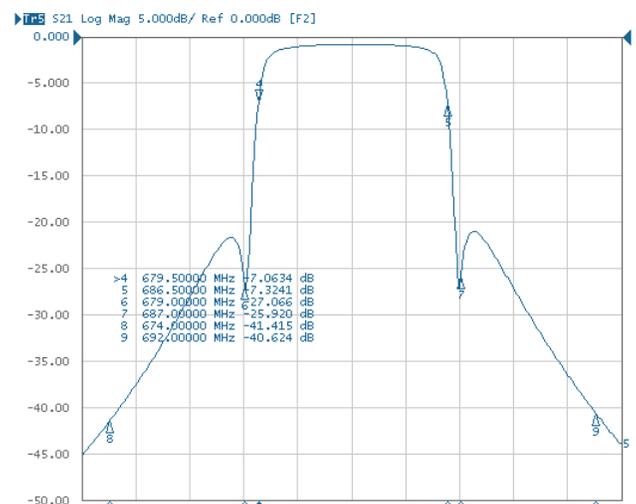

Alan Dick Broadcast Ltd

Design, supply & manufacture communication infrastructure systems on a global scale by offering products and services for Wireless networks.

• Americas • Asia Pacific • Europe • Middle East

© Alan Dick Broadcast Ltd

www.alandickbroadcast.com